

RIBA ARCI-70

Touchscreen indicator



Specification

Characteristics

Operation

**Interface
Connection**

Intelligent Weighing Indicator



Embedded System

ARM Embedded System
Linux



Stable
Low power consumption



Hardware at a affordable price
No license fee required



High Scalability



B7

ABS plastic housing



7 inch operator display

Rear View



Check Weighing & Counting

Hi-Lo
Limits

The screenshot shows a weighing scale interface with the following elements:

- Weight:** 0.00 kg
- Tare:** 0.00 kg
- Gross:** 0.00 kg
- Hi-Lo Limits:** Low 0.00 kg, ok, High 0.00 kg
- Product:** (empty field)
- Target:** 0.00 kg
- Progress Bar:** 0%
- Count:** 0
- Total:** 0.00 kg
- Control Buttons:** Product (magnifying glass), Sample (clusters), UW (g+), Hi-Lo (bell), CE (hand), G/N Gross (G/N), Save (printer), Total (Σ), Pre-Tare (arrow with T).

Tare & Gross
weight window

Unit Weight Key

Pre-Tare
key

Save/Print
Key

Total Report
Key



Customizable ID

PLU	Product Name	0/200
000		
001	Agarics	
002	Ale	
003	Almond	
004	Aniseed	
005	Apple	
006	Apricot	
007	Areca	
008	Bacon	
009	Balsam pear	
010	Banana	

Vertical navigation bar: A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

Control panel: +, trash, ↑, ↓, Back

ID
selectable
For to use



ID Management

Product Setting

Product Number:

Product Name:


Barcode:

Unit weight: g/pcs

Pre-Tare: kg

Low limit: kg

High limit: kg



[Back](#)

Product Setting

Product Number:

Product Name:

Barcode:

Unit weight: g/pcs

Pre-Tare: kg

Low limit: pcs

High limit: pcs

Product Setting

Product Number:

Product Name:

Barcode:

Unit weight: g/pcs

Pre-Tare: kg

Low limit: kg

High limit: kg

PLU	Product Name	0/200
000		
001	Agarics	
002	Ale	
003	Almond	
004	Aniseed	
005	Apple	
006	Apricot	
007	Areca	
008	Bacon	
009	Balsam pear	
010	Banana	

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

[+](#)

[-](#)

[↑](#) [↓](#)

[Back](#)



B7 Interface

Load cell

Adaptor
Jack




COM1

USB*2



Scale Management

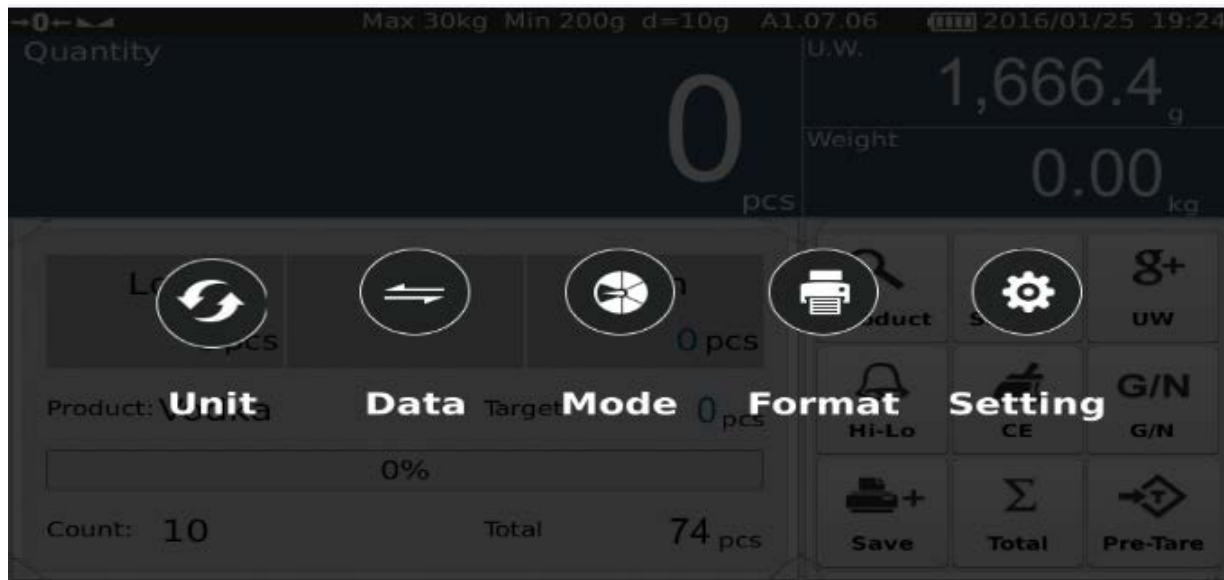

Interface & Communication



Direct Printer Connectivity

Mode:

Baud rate:

Data bits:

Stop bits:





epm205
os2130
rg88v
pos76xx
rp76
Epsa...300k
BL_F1182
ASCII
XP58_IMAGE
LP2824



Various Accessories




Customized Print Out

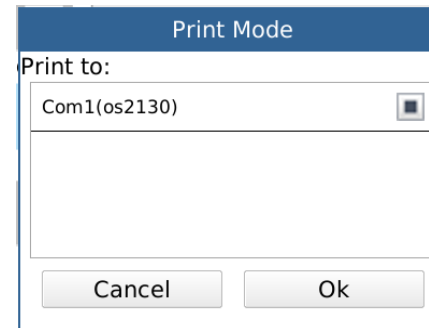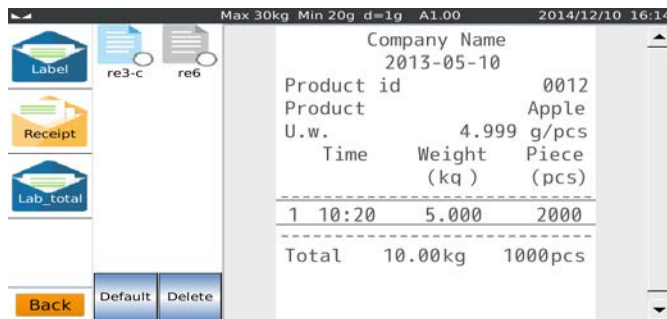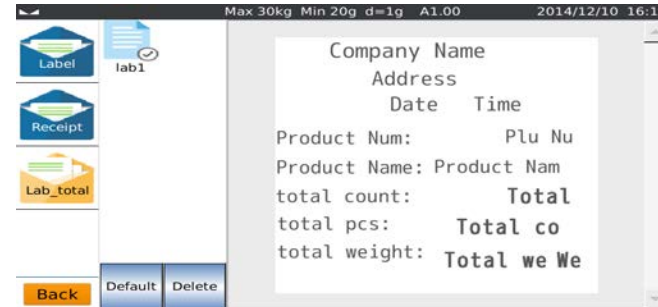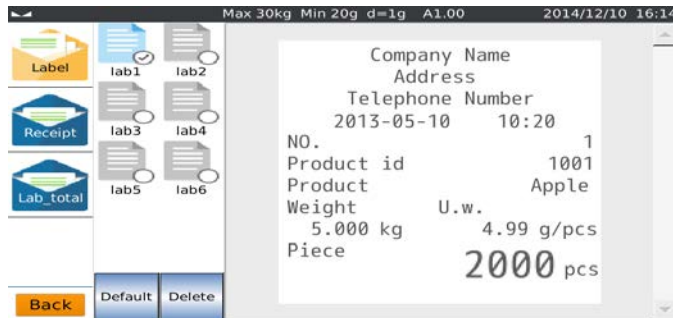


Easily programmable print formats. It will print logo, barcode, different languages etc.





Data Transfer

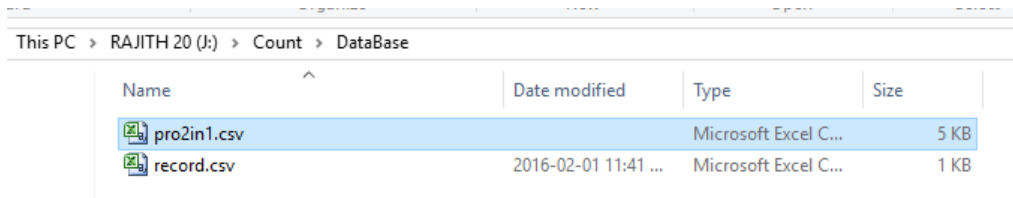

Data transferring by using USB disk



Specification

- Resistive -Touch Operating System
- 7" TFT LCD display
- Selectable weighing units
- High –Low Limits operation with 3 color indication
- Weighing Display switch to full screen
- Target Setting and warning graph.
- Total list printable
- 6 Pre-Tare keys
- Built-in real time clock
- 128MB RAM and 256MB FLASH Memory
- 200 Product ID storage capacity
- 999 Total Data storage capacity
- Simple calibration options
- Multi Print & Customized Print format option
- Com Port: Serial communication port allows to connect to PC / score board / mini printer / Ticket Printer / Label printer etc.
- Up to 4 load cell
- Optional multi - language selection.

*Functions & Specification's are subject to change without notice

